

S917 V11

7" Industrial Tablet PC



S917V11



7 INCH INDUSTRIAL TABLET PC DIFFERENT INDUSTRIAL AREA

7200mah big battery

Android 9 OS, 1.8GHZ CPU,4G RAM,64G ROM

IP67 Grade



Function and photo



Android 9.0



4G



WiFi



Bluetooth



GPS



Camera



NFC/HF RFID



1D barcode




2D barcode



LF/UHF RFID



Fingerprint

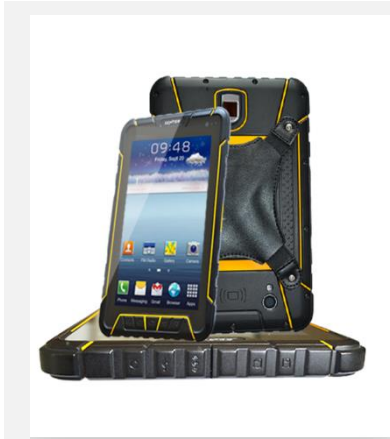

Key features

- Android 9.0, Qualcomm SDM450, 8 core 1.8 GHz CPU, RAM 4G ROM 64 G, Micro SD 128G
- IP67 three protection grade, drop resistance from 1.2m
- 7 inch LCD screen, 1280*800IPS capacitive touch screen
- 1D/2D bar code scanning, LF/HF/UHF RFID reader, fingerprint identification
- Google store and free SDK
- 3G/4G, WIFI, Bluetooth, GPS
- 3.7V, 7200mAh
- CCC/CE/ROSH/FCC/IP67/MIL-STD-810G
- 209*139*19mm, 590g

Specification

General Specification

Display Screen	7 inch LCD screen, 1280x800 IPS screen, capacitive, touch screen
Operating System	Android 9.0
CPU	Qualcomm SDM450, 8 core, 1.8G, RAM 4G ROM 64G, Micro SD maximum 128G
USB port and OTG	5 pin MicroUSB; support OTG (U-disk/Mouse/Keyboard/USB Ethernet cable) Through OTG can meet 100M network port, network card setup, PPPoE dial-up, web browsing. Support OTG extend RS232 serial port
External port	Charge port, headphone port

Protection Grade

Industrial Protection Grade	IP67
Drop Grade	Drop resistance from 1.2m

Wireless Communication

Bluetooth	4.2
GPS	Support GPS, DBS, GLONASS and professional GPS,Ublox; GPS and Beidou (alternative)
WIFI	IEEE 802.11b/g/n, 2.G and 5G
2G/3G/4G	<p>Band Version 1 (North America version) LTE-FDD:B2/B4/B5/B7/B12/B13/B14/B25/B26 LTE-TDD:B41 WCDMA:B1/B2/B5/B8 GSM:850/1900MHz</p> <p>Band Version 2 (Europe, Middle East, Africa/South Korea/Thailand) LTE-FDD:B2/B4/B5/B7/B8/B20/B28A LTE-TDD:B38/B40/B41 WCDMA:B1/B2/B5/B8 GSM:850/900/1800/1900MHz</p> <p>Band Version 2(China , India) LTE-FDD:B1/B3/B5/B8 LTE-TDD:B34/B38/B39/B40/B41 WCDMA:B1/B8 TD-SCDMA:B34/B39 EVDO/CDMA:BC0 GSM:900/1800M</p>

Physical Parameters

Camera	5 MP front camera, 13 MP rear camera with automatic focus and lighting function
--------	---

Keyboard	Android menu, Homepage, Return, Volume, Barcode, ON/OFF, Reset
Headset	3.5mm audio Interface, has mike and telephone receiver
LED indicator light	Support (ordinary flicker, Call fast flicker, missed calls) three status bar
Flashlight Function	Support, can be used for emergency lighting
Gravity sensor	Support
Vibrating motor	Support
Compass	Support
FM	Support
Lithium Battery	3.7V, 7200mAh
Standby	Standby current less than 10mA
Dimension	209*139*19mm
Weight	590g

Environmental Characteristics

Working Temperature	-10°C ~ +50°C
Storage Temperature	-40°C ~ +60°C
Humidity	5%-95% relative humidity; no condensation

Optional function

Barcode Scanning	1D CCD: Motorola SE655 (in host)
	1D laser barcod scan: Honeywell N4313 (in host) Zebra EM1350
	2D laser barcod scan: Honeywell N3680 (in jacket, Hardware decoding) Honeywell 6603 (in host, software decoding, better than hardware decoding)
RFID	NFC (HF) RFID: Working frequency: 13.56MHZ
	LF RFID: 134KHZ LF RFID or 125KHZ LF RFID
	UHF RFID: Working frequency: 840-960MHz(customization of required frequency band)

High precise GPS

Ublox M8N, accuracy 2m

Industrial Fingerprint

Support

Standard accessory



Charger



USB cable



Handbelt

Optional accessory




Earphone



OTG device
USB-LAN RJ45



Vehicle Charger




Holder on the wall



Straps and Touch pen



Bag



Part A



Part B



Part C(Choose one of the above four)

Vehicle mount bracket (Part A+Part B+Part C)

Contact

Anthea Liu
Overseas Director

Email: anthea@senter.com.cn

Mobile/Whatsapp/Skype: +86-13864445371

QQ: 626800474 Wechat: +86-13864445371

<http://senter-e.com/>

Shandong Senter Electronic Co., Ltd

Add: No.18, Liuyishan Road, New&Hi-tech Area, Zibo, Shandong
Province, China 255088



<http://senter-e.com/>